

Simultaneous encodings for range and next/previous larger/smaller value queries*

Seungbum Jo and Srinivasa Rao Satti
Seoul National University, South Korea
sbcho,ssrao@tcs.snu.ac.kr

Abstract

Given an array of n elements from a total order, we propose encodings that support various range queries (range minimum, range maximum and their variants), and previous and next smaller/larger value queries. When query time is not of concern, we obtain a $4.088n + o(n)$ -bit encoding that supports all these queries. For the case when we need to support all these queries in constant time, we give an encoding that takes $4.585n + o(n)$ bits, where n is the length of input array. This improves the $5.08n + o(n)$ -bit encoding obtained by encoding the colored $2d$ -Min and Max heaps proposed by Fischer [TCS, 2011]. We first extend the original DFUDS [Algorithmica, 2005] encoding of the colored $2d$ -Min (Max) heap that supports the queries in constant time. Then, we combine the extended DFUDS of $2d$ -Min heap and $2d$ -Max heap using the Min-Max encoding of Gawrychowski and Nicholson [ICALP, 2015] with some modifications. We also obtain encodings that take lesser space and support a subset of these queries.

1 Introduction

Given an array $A[1 \dots n]$ of n elements from a total order. For $1 \leq i \leq j \leq n$, suppose that there are m (l) positions $i \leq p_1 \leq \dots \leq p_m \leq j$ ($i \leq q_1 \leq \dots \leq q_l \leq j$) in A which are the positions of minimum (maximum) values between $A[i]$ and $A[j]$. Then we can define various range minimum (maximum) queries as follows.

- Range Minimum Query ($\text{RMinQ}_A(i, j)$) : Return an arbitrary position among $p_1, \dots, p_m$.
- Range Leftmost Minimum Query ($\text{RLMinQ}_A(i, j)$) : Return p_1 .
- Range Rightmost Minimum Query ($\text{RRMinQ}_A(i, j)$) : Return p_j .
- Range k -th Minimum Query ($\text{RkMinQ}_A(i, j)$) : Return p_k (for $1 \leq k \leq m$).
- Range Maximum Query ($\text{RMaxQ}_A(i, j)$) : Return an arbitrary position among $q_1, \dots, q_l$.
- Range Leftmost Maximum Query ($\text{RLMaxQ}_A(i, j)$) : Return q_1 .
- Range Rightmost Maximum Query ($\text{RRMaxQ}_A(i, j)$) : Return q_l .
- Range k -th Maximum Query ($\text{RkMaxQ}_A(i, j)$) : Return q_k (for $1 \leq k \leq l$).

Also for $1 \leq i \leq n$, we consider following additional queries on A .

- Previous Smaller Value ($\text{PSV}_A(i)$) : $\max(j : j < i, A[j] < A[i])$.

*Preliminary version of these results have appeared in the proceedings of the 21st International Computing and Combinatorics Conference (COCOON-2015) [1]

- Next Smaller Value ($\text{NSV}_A(i)$) : $\min(j : j > i, A[j] < A[i])$.
- Previous Larger Value ($\text{PLV}_A(i)$) : $\max(j : j < i, A[j] > A[i])$.
- Next Larger Value ($\text{NLV}_A(i)$) : $\min(j : j > i, A[j] > A[i])$.

For define above four queries formally, we assume that $A[0] = A[n+1] = -\infty$ for $\text{PSV}_A(i)$ and $\text{NSV}_A(i)$. Similarly we assume that $A[0] = A[n+1] = \infty$ for $\text{PLV}_A(i)$ and $\text{NLV}_A(i)$.

Our aim is to obtain space-efficient encodings that support these queries efficiently. An encoding should support the queries without accessing the input array (at query time). The minimum size of an encoding is also referred to as the *effective entropy* of the input data (with respect to the queries) [2]. We assume the standard word-RAM model [3] with word size $\Theta(\lg n)$.

Previous Work The range minimum/maximum problem has been well-studied in the literature. It is well-known [4] that finding RMinQ_A can be transformed to the problem of finding the LCA (Lowest Common Ancestor) between (the nodes corresponding to) the two query positions in the Cartesian tree constructed on A . Furthermore, since different topological structures of the Cartesian tree on A give rise to different set of answers for RMinQ_A on A , one can obtain an information-theoretic lower bound of $2n - \Theta(\lg n)^1$ bits on the encoding of A that answers RMinQ queries. Sadakane [5] proposed the $4n + o(n)$ -bit encoding with constant query time for RMinQ_A problem using the balanced parentheses (BP) [6] of the Cartesian tree of A with some additional nodes. Fischer and Heun [7] introduced the $2d$ -Min heap, which is a variant of the Cartesian tree, and showed how to encode it using the Depth first unary degree sequence (DFUDS) [8] representation in $2n + o(n)$ bits which supports RMinQ_A queries in constant time. Davoodi et al. show that same $2n + o(n)$ -bit encoding with constant query time can be obtained by encoding the Cartesian trees [9]. For RkMinQ_A , Fischer and Heun [10] defined the *approximate range median of minima query* problem which returns a position RkMinQ_A for some $\frac{1}{16}m \leq k \leq \frac{15}{16}m$, and proposed an encoding that uses $2.54n + o(n)$ bits and supports the *approximate RMinQ* queries in constant time, using a *Super Cartesian tree*.

For PSV_A and NSV_A , if all elements in A are distinct, then $2n + o(n)$ bits are enough to answer the queries in constant time, by using the $2d$ -Min heap of Fischer and Heun [7]. For the general case, Fischer [11] proposed the *colored 2d-Min heap*, and proposed an optimal $2.54n + o(n)$ -bit encoding which can answer PSV_A and NSV_A in constant time. As the extension of the PSV_A and NSV_A , one can define the *Nearest Larger Neighbor* ($\text{NLN}(i)$) on A which returns $\text{PSV}_A(i)$ if $i - \text{PSV}_A(i) \leq \text{NSV}_A(i) - i$ and returns $\text{NSV}_A(i)$ otherwise. This problem was first discussed by Berkman et al. [12] and they proposed a parallel algorithm to answer NLN queries for all positions on the array (this problem is defined as *All-Nearest Larger Neighbor (ANLN) problem*.) and Asano and Kirkpatrick [13] proposed time-space tradeoff algorithms for ANLN problem. Jayapaul et al. [14] proposed $2n + o(n)$ -bit encoding which supports an $\text{NLN}(i)$ on A in constant time if all elements in A are distinct.

One can support both RMinQ_A and RMaxQ_A in constant time trivially using the encodings for RMinQ_A and RMaxQ_A queries, using a total of $4n + o(n)$ bits. Gawrychowski and Nicholson reduce this space to $3n + o(n)$ bits while maintaining constant time query time [15]. Their scheme also can support PSV_A and PLV_A in constant time when there are no consecutive equal elements in A .

Our results In this paper, we first extend the original DFUDS [8] for colored $2d$ -Min(Max) heap that supports the queries in constant time. Then, we combine the extended DFUDS of $2d$ -Min heap and $2d$ -Max heap using Gawrychowski and Nicholson's Min-Max encoding [15] with some modifications. As a result, we obtain the following non-trivial encodings that support a wide range of queries.

Theorem 1. *An array $A[1 \dots n]$ containing n elements from a total order can be encoded using*

- at most $3.17n + o(n)$ bits to support RMinQ_A , RMaxQ_A , RRMinQ_A , RRMaxQ_A , PSV_A , and PLV_A queries;*

¹We use $\lg n$ to denote $\log_2 n$

(b) at most $3.322n + o(n)$ bits to support the queries in (a) in constant time;

(c) at most $4.088n + o(n)$ bits to support $RMinQ_A$, $RRMinQ_A$, $RLMinQ_A$, $RkMinQ_A$, PSV_A , NSV_A , $RMaxQ_A$, $RRMaxQ_A$, $RLMaxQ_A$, $RkMaxQ_A$, PLV_A and NLV_A queries; and

(d) at most $4.585n + o(n)$ bits to support the queries in (c) in constant time.

If the array contains no two consecutive equal elements, then (a) and (b) take $3n + o(n)$ bits, and (c) and (d) take $4n + o(n)$ bits.

This paper organized as follows. Section 2 introduces various data structures that we use later in our encodings. In Section 3, we describe the encoding of colored $2d$ -Min heap by extending the DFUDS of $2d$ -Min heap. This encoding uses a distinct approach from the encoding of the colored $2d$ -Min heap by Fischer [11]. Finally, in Section 4, we combine the encoding of this colored $2d$ -Min heap and Gawrychowski and Nicholson's Min-Max encoding [15] with some modifications, to obtain our main result (Theorem 1).

2 Preliminaries

We first introduce some useful data structures that we use to encode various bit vectors and balanced parenthesis sequences.

Bit strings (parenthesis sequences) Given a string $S[1 \dots n]$ over the alphabet $\Sigma = \{ (,) \}$, $\text{rank}_S(i, x)$ returns the number of occurrence of the pattern $x \in \Sigma^*$ in $S[1 \dots i]$ and $\text{select}_S(i, x)$ returns the first position of i -th occurrence of $x \in \Sigma^*$ in S . Combining the results from [16] and [17], one can show the following.

Lemma 2.1 ([16], [17]). *Let S be a string of length n over the alphabet $\Sigma = \{ '(', ') ' \}$ containing m closing parentheses. One can encode S using $\lg \binom{n}{m} + o(n)$ bits to support both $\text{rank}_S(i, x)$ and $\text{select}_S(i, x)$ in constant time, for any pattern x with length $|x| \leq 1/2 \lg n$. Also, we can decode any $\lg n$ consecutive bits in S in constant time.*

Balanced parenthesis sequences Given a string $S[1 \dots n]$ over the alphabet $\Sigma = \{ '(', ') ' \}$, if S is balanced and $S[i]$ is an open (close) parenthesis, then we can define $\text{findopen}_S(i)$ ($\text{findclose}_S(i)$) which returns the position of the matching close (open) parenthesis to $S[i]$. Now we introduce the lemma from Munro and Raman [6].

Lemma 2.2 ([6]). *Let S be a balanced parenthesis sequence of length n . If one can access any $\lg n$ -bit subsequence of S in constant time, Then both $\text{findopen}_S(i)$ and $\text{findclose}_S(i)$ can be supported in constant time with $o(n)$ -bit additional space.*

Depth first unary degree sequence *Depth first unary degree sequence (DFUDS)* is one of the well-known methods for representing ordinal trees [8]. It consists of a balanced sequence of open and closed parentheses, which can be defined inductively as follows. If the tree consists of the single node, its DFUDS is $'()''$. Otherwise, if the ordinal tree T has k subtrees $T_1 \dots T_k$, then its DFUDS, D_T is the sequence $\binom{k+1}{1} d_{T_1} \dots d_{T_k}$ (i.e., $k+1$ open parentheses followed by a close parenthesis concatenated with the 'partial' DFUDS sequences $d_{T_1} \dots d_{T_k}$) where d_{T_i} , for $1 \leq i \leq k$, is the DFUDS of the subtree T_i (i.e., D_{T_i}) with the first open parenthesis removed. From the above construction, it is easy to prove by induction that if T has n nodes, then the size of D_T is $2n$ bits. The following lemma shows that DFUDS representation can be used to support various navigational operations on the tree efficiently.

Lemma 2.3 ([18], [8], [19]). *Given an ordinal tree T on n nodes with DFUDS sequence D_T , one can construct an auxiliary structure of size $o(n)$ bits to support the following operations in constant time: for any two nodes x and y in T ,*

- $\text{parent}_T(x)$: Label of the parent node of node x .
- $\text{degree}_T(x)$: Degree of node x .
- $\text{depth}_T(x)$: Depth of node x (The depth of the root node is 0).
- $\text{subtree_size}_T(x)$: Size of the subtree of T which has the x as the root node.
- $\text{next_sibling}_T(x)$: The label of the next sibling of the node x .
- $\text{child}_T(x, i)$: Label of the i -th child of the node x .
- $\text{child_rank}_T(x)$: Number of siblings left to the node x .
- $\text{la}_T(x, i)$: Label of the level ancestor of node x at depth i .
- $\text{lca}_T(x, y)$: Label of the least common ancestor of node x and y .
- $\text{pre_rank}_T(i)$: The preorder rank of the node in T corresponding to $D_T[i]$.
- $\text{pre_select}_T(x)$: The first position of node with preorder rank x in D_T .

We use the following lemma to bound the space usage of the data structures described in Section 4.

Lemma 2.4. *Given two positive integers a and n , and a nonnegative integer $k \leq n$, $\lg \binom{n}{k} + a(n-k) \leq n \lg(2^a + 1)$.*

Proof. By raising both sides to the power of 2, it is enough to prove that $\binom{n}{k} 2^{a(n-k)} \leq (2^a + 1)^n$. We prove the lemma by induction on n and k . In the base case, when $n = 1$ and $k = 0$, the claim holds since $2^a < (2^a + 1)$. Now suppose that $\binom{n'}{k'} 2^{a(n'-k')} \leq (2^a + 1)^{n'}$ for all $0 < n' \leq n$ and $0 \leq k' \leq k$. Then

$$\begin{aligned} \binom{n+1}{k} 2^{a(n+1-k)} &= \left(\binom{n}{k} + \binom{n}{k-1} \right) 2^{a(n+1-k)} \leq 2^a (2^a + 1)^n + (2^a + 1)^n \\ &= (2^a + 1)^{n+1} \text{ by induction hypothesis.} \end{aligned}$$

Also by induction hypothesis,

$$\binom{n}{k+1} 2^{a(n-(k+1))} = \left(\binom{n-1}{k} + \binom{n-1}{k+1} \right) 2^{a(n-(k+1))} \leq (2^a + 1)^{n-1} \left(1 + \frac{\binom{n-1}{k+1} (2^{a(n-1-k)})}{(2^a + 1)^{n-1}} \right)$$

Since $\binom{n-1}{k+1} 2^{a(n-1-k)} < 2^a (2^a + 1)^{n-1}$ ($\because (2^a + 1)^{n-1} = \sum_{m=0}^{n-1} \binom{n-1}{m} 2^{a(n-1-m)}$),

$$(2^a + 1)^{n-1} \left(1 + \frac{\binom{n-1}{k+1} (2^{a(n-1-k)})}{(2^a + 1)^{n-1}} \right) < (2^a + 1)^{n-1} (1 + 2^a) = (2^a + 1)^n.$$

Therefore the above inequality still holds when $n' = n + 1$ or $k' = k + 1$, which proves the lemma. $\square$

2.1 2d-Min heap

The 2d-Min heap [7] on A , denoted by $\text{Min}(A)$, is designed to encode the answers of $\text{RMinQ}_A(i, j)$ efficiently. We can also define the 2d-Max heap on A ($\text{Max}(A)$) analogously. $\text{Min}(A)$ is an ordered labeled tree with $n+1$ nodes labeled with $0 \dots n$. Each node in $\text{Min}(A)$ is labeled by its preorder rank and each label corresponds to a position in A . We extend the array $A[1 \dots n]$ to $A[0 \dots n]$ with $A[0] = -\infty$. In the labeled tree, the node x denotes the node labeled x . For every vertex i , except for the root node, its parent node is (labeled with) $\text{PSV}_A(i)$.

Using the operations in Lemma 2.3, Fischer and Heun [7] showed that $\text{RMinQ}_A(i, j)$ can be answered in constant time using $D_{\text{Min}(A)}$. If the elements in A are not distinct, $\text{RMinQ}_A(i, j)$ returns the $\text{RRMinQ}_A(i, j)$.

Fischer and Heun [7] also proposed a linear-time stack-based algorithm to construct $D_{\text{Min}(A)}$. Their algorithm maintains a min-stack consisting of a decreasing sequence of elements from top to the bottom. The elements of A are pushed into the min-stack from right to left and before pushing the element $A[i]$, all the elements from the stack that are larger than $A[i]$ are popped. Starting with an empty string, the algorithm constructs a sequence S as described below. Whenever k elements are popped from the stack and

then an element is pushed into the stack, $(^k)$ is prepended to S . Finally, after pushing $A[1]$ into the stack, if the stack contains m elements, then $(^{m+1})$ is prepended to S . One can show that this sequence S is the same as the DFUDS sequence $D_{\text{Min}(A)}$. Analogously, one can construct $D_{\text{Max}(A)}$ using a similar stack-based algorithm.

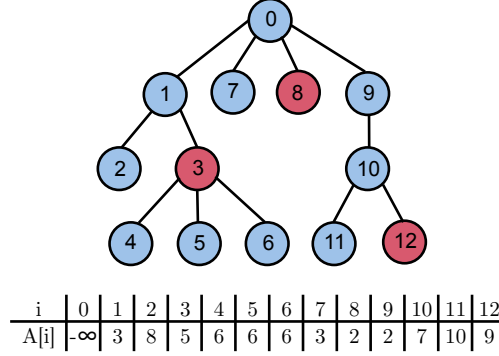


Figure 1: Colored 2d-Min heap of A

Colored 2d-Min heap From the definition of 2d-Min heap, it is easy to show that $\text{PSV}_A(i)$, for $1 \leq i \leq n$, is the label corresponding to the parent of the node labeled i in $\text{Min}(A)$. Thus, using the encoding of Lemma 2.3 using $2n + o(n)$ bits, one can support the $\text{PSV}_A(i)$ queries in constant time. A straightforward way to support $\text{NSV}_A(i)$ is to construct the 2d-Min heap structure for the reverse of the array A , and encode it using an additional $2n + o(n)$ bits. Therefore one can encode all answers of PSV_A and NSV_A using $4n + o(n)$ bits with constant query time. To reduce this size, Fischer proposed the *colored 2d-Min heap* [11]. This has the same structure as normal 2d-Min heap, and in addition, the vertices are colored either red or blue. Suppose there is a parent node x in the colored 2d-Min heap with its children $x_1 \dots x_k$. Then for $1 < i \leq k$, node x_i is colored red if $A[x_i] < A[x_{i-1}]$, and all the other nodes are colored blue (see Figure 1). We define the operation $\text{NRS}(x_i)$ which returns the leftmost red sibling to the right (i.e., next red sibling) of x_i .

The following lemma can be used to support $\text{NSV}_A(i)$ efficiently using the colored 2d-Min heap representation.

Lemma 2.5 ([11]). *Let $\text{CMin}(A)$ be the colored 2d-Min heap on A . Suppose there is a parent node x in $\text{CMin}(A)$ with its children $x_1 \dots x_k$. Then for $1 \leq i \leq k$,*

$$\text{NSV}_A(x_i) = \begin{cases} \text{NRS}(x_i) & \text{if } \text{NRS}(x_i) \text{ exists,} \\ x_k + \text{subtree_size}(x_k) & \text{otherwise.} \end{cases}$$

If all the elements in A are distinct, then a $2n + o(n)$ -bit encoding of $\text{Min}(A)$ is enough to support RMinQ_A , PSV_A and NSV_A with constant query time. In the general case, Fischer proposed an optimal $2.54n + o(n)$ -bit encoding of colored 2d-Min heap on A using TC-encoding [20]. This encoding also supports two additional operations, namely $\text{modified_child}_{\text{CMin}(A)}(x, i)$ and $\text{child_rank}_{\text{CMin}(A)}(x)$, which answer the i -th red child of node x and the number of red siblings to the left of node x , respectively, in constant time. Using these operations, one can also support RLMinQ_A and RkMinQ_A in constant time.

2.2 Encoding range min-max queries

One can support both RMinQ_A and RMaxQ_A in constant time by encoding both $\text{Min}(A)$ and $\text{Max}(A)$ separately using $4n + o(n)$ bits. Gawrychowski and Nicholson [15] described an alternate encoding that uses only $3n + o(n)$ bits while still supporting the queries in $O(1)$ time. There are two key observations which are used in obtaining this structure:

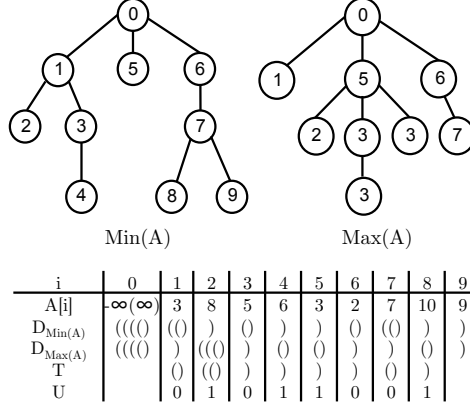


Figure 2: Encoding of 2d-Min heap and 2d-Max heap of A

1. If we can access any $\lg n$ -bit substring of $D_{\text{Min}(A)}$ and $D_{\text{Max}(A)}$ on $O(1)$ time, we can still support both queries in $O(1)$ time, using an additional $o(n)$ bits;
2. To generate $D_{\text{Min}(A)}$ and $D_{\text{Max}(A)}$ using Fischer and Heun's stack-based algorithm, in each step we push an element into both the min-stack and max-stack, and pop a certain number of elements from exactly one of the stacks (assuming that $A[i] \neq A[i+1]$, for all i , where $1 \leq i < n$).

Now we describe the overall encoding in [15] briefly. The structure consists of two bit strings T and U along with various auxiliary structures. For $1 \leq i < n$, if k elements are popped from the min (max)-stack when we push $A[i]$ ($1 \leq i < n$) into both the stacks (from right to left), we prepend $(^{k-1})$ and $0(1)$ to the currently generated T and U respectively. Initially, when $i = n$, both min and max stacks push $)$ so we do not prepend anything to both strings. But we can recover it easily because this is the last $)$ in common. Finally, after pushing $A[1]$ into both the stacks, we pop the remaining elements from them, and store the number of these popped elements in min and max stack explicitly using $\lg n$ bits. One can show that the size of T is at most $2n$ bits, and that of U is $n - 1$ bits. Thus the total space usage is at most $3n$ bits. See Algorithm 1 for the pseudocode, and Figure 2 for an example.

To recover any $\lg n$ -bit substring, $D_{\text{Min}(A)}[d_1 \dots d_{\lg n}]$, in constant time we construct the following auxiliary structures. We first divide $D_{\text{Min}(A)}$ into blocks of size $\lg n$, and for the starting position of each block, store its corresponding position in T . For this purpose, we construct a bit string B_{min} of length at most $2n$ such that $B_{\text{min}}[i] = 1$ if and only if $T[i]$ corresponds to the start position of the i -th-block in $D_{\text{Min}(A)}$. We encode B_{min} using the representation of Lemma 2.1 which takes $o(n)$ bits since the number of ones in B_{min} is $2n/\lg n$. Then if d_1 belongs to the i -th block, it is enough to recover the i -th and the $(i+1)$ -st blocks in the worst case.

Now, to recover the i -th block of $D_{\text{Min}(A)}$, we first compute the distance between i -th and $(i+1)$ -st 1's in B_{min} . If this distance is less than $c \lg n$ for some fixed constant $c > 9$, we call it a *min-good block*, otherwise, we call it a *min-bad block*. We can recover a min-good block in $D_{\text{Min}(A)}$ in $O(c)$ time using a $o(n)$ -bit pre-computed table indexed by all possible strings of length $\lg n/4$ bits for T and U (we can find the position corresponding to the i -th block in U in constant time), which stores the appropriate $O(\lg n)$ bits of $D_{\text{Min}(A)}$ obtained from them (see [15] for details). For min-bad blocks, we store the answers explicitly. This takes $(2n/(c \lg n)) \cdot \lg n = 2n/c$ additional bits. To save this additional space, we store the min-bad blocks in compressed form using the property that any min-bad block in $D_{\text{Min}(A)}$ and $D_{\text{Max}(A)}$ cannot overlap more than $4 \lg n$ bits in T , (since any $2 \lg n$ consecutive bits in T consist of at least $\lg n$ bits from either $D_{\text{Min}(A)}$ or $D_{\text{Max}(A)}$). So, for $c > 9$ we can save more than $\lg n$ bits by compressing the remaining $(c-4) \lg n$ bits in T corresponding to each min-bad block in $D_{\text{Min}(A)}$. Thus, we can reconstruct any $\lg n$ -bit substring of $D_{\text{Min}(A)}$ (and $D_{\text{Max}(A)}$) in constant time, using a total of $3n + o(n)$ bits.

Algorithm 1 Construction algorithm for T and U

```
1: Initialize  $T$  to ‘), and  $U$  to  $\epsilon$ .
2: Initialize Min-stack and Max-stack as empty stacks
3: Push  $A[n]$  into Min-stack and Max-stack.
4: for  $i := n - 1$  to 1 do
5:   counter = 0
6:   if  $A[i] < A[i - 1]$  then
7:     Push  $A[i]$  into Max-stack
8:     while ((Min-stack is not empty) & (Top of Min-stack  $> A[i]$ )) do
9:       Pop Min-stack
10:    counter = counter + 1
11:   end while
12:   Push  $A[i]$  into Min-stack
13:   Prepend ( $counter - 1$ ) to  $T$  and 0 to  $U$ 
14: else //  $A[i] > A[i - 1]$ 
15:   Push  $A[i]$  into Min-stack
16:   while ((Max-stack is not empty) & (Top of Max-stack  $< A[i]$ )) do
17:     Pop Max-stack
18:    counter = counter + 1
19:   end while
20:   Push  $A[i]$  into Max-stack
21:   Prepend ( $counter - 1$ ) to  $T$  and 1 to  $U$ 
22: end if
23: end for
```

We first observe that if there is a position i , for $1 \leq i < n$ such that $A[i] = A[i + 1]$, we cannot decode the ‘)’ in T which corresponds to $A[i]$ only using T and U since we do not pop any elements from both min and max stacks when we push $A[i]$ into both stacks. Gawrychowski and Nicholson [15] handle this case by defining an ordering between equal elements (for example, by breaking the ties based on their positions). But this ordering does not help us in supporting the PSV and PLV queries. We describe how to handle the case when there are repeated (consecutive) elements in A , to answer the PSV and PLV queries.

Gawrychowski and Nicholson [15] also show that any encoding that supports both $RMinQ_A$ and $RMaxQ_A$ cannot use less than $3n - \Theta(\lg n)$ bits for sufficiently large n (even if all elements in A are distinct).

3 Extended DFUDS for colored 2d-Min heap


In this section, we describe an encoding of colored 2d-Min heap on A ($CMin(A)$) using at most $3n + o(n)$ bits while supporting $RMinQ_A$, $RRMinQ_A$, $RLMinQ_A$, $RkMinQ_A$, PSV_A and NSV_A in constant time. This is done by storing the color information of the nodes using a bit string of length at most n , in addition to the DFUDS representation of $CMin(A)$. We can also encode the colored 2d-Max heap in a similar way. In the worst case, this representation uses more space than the colored 2d-Min heap encoding of Fischer [11], but the advantage is that it separates the tree encoding from the color information. We later describe how to combine the tree encodings of the 2d-Min heap and 2d-Max heap, and (separately) also combine the color information of the two trees, to reduce the overall space.

Now we describe the main encoding of $CMin(A)$. The encoding consists of two parts: $D_{CMin(A)}$ and V_{min} . The sequence $D_{CMin(A)}$ is same as $D_{Min(A)}$, the DFUDS representation of $CMin(A)$, which takes $2n + o(n)$ bits and supports the operations in Lemma 2.3 in constant time.

The bit string V_{min} stores the color information of all nodes in $CMin(A)$, except the nodes which are the leftmost children of their parents (the color of these nodes is always blue), as follows. Suppose there are p nodes in $CMin(A)$, for $1 \leq p \leq n$, which are the leftmost children of their parents. Then we define the bit

$nodeV_{min}(i) = pre_rank_{CMin(A)}(findclose_{D_{CMin(A)}}(select_{D_{CMin(A)}}(i+1, ((')) + 1)$

in $CMin(A)$ is red, and 1 otherwise. This follows from the observation that if there is an $i, 1 \leq i < 2n - 1$ such that $D_{CMin(A)}[i] = '('$ and $D_{CMin(A)}[i+1] = ')'$, then $D_{CMin(A)}[i+2]$ corresponds to the node which is the leftmost child of the node $pre_rank_{CMin(A)}(D_{CMin(A)}[i])$, so we skip these nodes by counting the pattern $((('$ in $D_{CMin(A)}$. Also, we set $V_{min}[0] = 1$, which corresponds to the first open parenthesis in $D_{CMin(A)}$. For example, for $CMin(A)$ in Figure 1, we store the node 3's color in $V_{min}[4]$. This is because $select_{D_{CMin(A)}}(5, ((') = 7$, $findclose_{D_{CMin(A)}}(7) + 1 = 11$ and $pre_rank_{CMin(A)}(11) = 3$ (see Figure 3). We define the bit string V_{max} in a similar way.

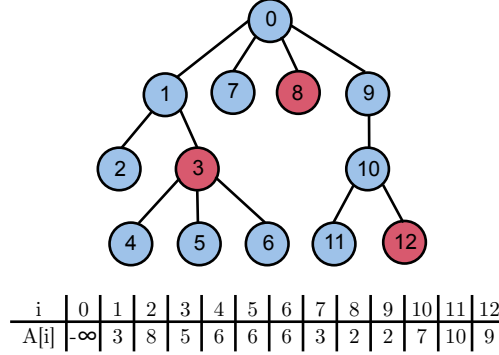

$D_{\text{CMin(A)}}$	(	(	(	(	(	)	(	(	)	)	(	(	(	)	)	)	)	(	)	(	)	)	)			
$\text{pre.rank}_{\text{CMin(A)}}$	0	0	0	0	0	0	1	1	1	2	3	3	3	3	4	5	6	7	8	9	9	10	10	10	11	12

V_{min}	1	1	0	1	0	1	1	0
$nodeV_{min}$	-	9	8	7	3	6	5	12

$pre_select_{CMin(A)}$	1	7	10	11	15	16	17	18	19	20	22	25	26
$node_color_{CMin(A)}$	-	-	-	4	-	6	5	3	2	1	-	-	7

Figure 3: $D_{\text{CMin(A)}}$, $pre_rank_{\text{CMin(A)}}$, $V_{min}[i]$, $node_{V_{min}}$, $pre_select_{\text{CMin(A)}}$ and $node_color_{\text{CMin(A)}}$ for colored 2d-Min heap

The following lemma shows that encoding $\text{Min}(\mathbf{A})$ and $V_{\min}$ separately, using at most $3n + o(n)$ bits, has the same functionality as the $\text{CMin}(\mathbf{A})$ encoding of Fischer [11], which only takes $2.54n + o(n)$ bits.

Lemma 3.1. *For an array $A[1 \dots n]$ of length n , there is an encoding for A which takes at most $3n + o(n)$ bits and supports $RMinQ_A$, $RRMinQ_A$, $RLMinQ_A$, $RkMinQ_A$, PSV_A and NSV_A in constant time.*

Proof. The encoding consists of the $2n + o(n)$ -bit encoding of $\text{Min}(\mathbf{A})$ encoded using structure of Lemma 2.3, together with the bit string $V_{\min}$ that stores the color information of the nodes in $\text{CMin}(\mathbf{A})$. We use a $o(n)$ -bit auxiliary structure to support the **rank/select** queries on $V_{\min}$ in constant time. Since the size of $V_{\min}$ is at most n bits, the total space of the encoding is at most $3n + o(n)$ bits.

To define the correspondence between the nodes in $\text{CMin}(\mathbf{A})$ and the positions in the bit string $V_{\min}$, we define the following operation. For $0 \leq i \leq n$, we define $\text{node_color}_{\text{CMin}(\mathbf{A})}(i)$ as the position of $V_{\min}$ that stores the color of the node i in $\text{CMin}(\mathbf{A})$. This can be computed in constant time, using $o(n)$ bits, by

$$node_color_{\text{CMin}(\mathbf{A})}(i) = \begin{cases} \text{undefined} & \text{if } child_rank_{\text{CMin}(\mathbf{A})}(i) = 0 \\ \mathbf{rank}_{D_{\text{CMin}(\mathbf{A})}}(c, ((') - 1 & \text{otherwise} \end{cases}$$

where $c = \text{findopen}_{D_{\text{CMin(A)}}}(\text{pre_select}_{\text{CMin(A)}}(i) - 1)$ (note that $\text{node_color}_{\text{CMin(A)}}$ is the inverse operation of $\text{node}_{V_{\text{min}}}$, i.e, if $\text{node}_{V_{\text{min}}}(k) = i$, then $\text{node_color}_{\text{CMin(A)}}(i) = k$).

Now we describe how to support the queries in constant time. Fischer and Heun [7] showed that $\text{RMinQ}_A(i, j)$ can be answered in constant time using $D_{\text{CMin}(A)}$. In fact, they return the position $\text{RRMinQ}_A(i, j)$ as the answer to $\text{RMinQ}_A(i, j)$. Also, as mentioned earlier, $\text{PSV}_A(i) = \text{parent}_{\text{CMin}(A)}(i)$, and hence can be answered in constant time. Therefore, it is enough to describe how to find $\text{RLMinQ}_A(i, j)$, $\text{RkMinQ}_A(i, j)$ and $\text{NSV}_A(i)$ in constant time.

RLMinQ_A(i, j): As shown by Fischer and Huen [7], all corresponding values of left siblings of the node $\text{RRMinQ}_A(i, j)$ in A are at least $A[\text{RRMinQ}_A(i, j)]$ (i.e., the values of the siblings are in the non-increasing order, from left to right). Also, for a child node m of any of the left siblings of the node $\text{RRMinQ}_A(i, j)$, $A[m] > A[\text{RRMinQ}_A(i, j)]$. Therefore, the position $\text{RLMinQ}_A(i, j)$ corresponds to one of the left siblings of the node whose position corresponds to $\text{RRMinQ}_A(i, j)$.

We first check whether the color of the node $\text{RRMinQ}_A(i, j)$ is red or not using $V_{\min}$. If

$$V_{\min}[\text{node_color}_{\text{CMin}(A)}(\text{RRMinQ}_A(i, j))] = 0$$

then $\text{RLMinQ}_A(i, j) = \text{RRMinQ}_A(i, j)$. If not, we find the node $\text{leftmost}(i, j)$ which is the leftmost sibling of the node $\text{RRMinQ}_A(i, j)$ between the nodes in $[i \dots j]$. $\text{leftmost}(i, j)$ can be found in constant time by computing the depth of node i and comparing this value with d_{right} , the depth of the node $\text{RRMinQ}_A(i, j)$. More specifically,

$$\text{leftmost}(i, j) = \begin{cases} i & \text{if } \text{depth}_{\text{CMin}(A)}(i) = d_{\text{right}}. \\ \text{next_sibling}_{\text{CMin}(A)}(\text{la}_{\text{CMin}(A)}(i, d_{\text{right}})) & \text{otherwise.} \end{cases}$$

In the next step, find the leftmost blue sibling n_v such that there is no red sibling between n_v and $\text{RRMinQ}_A(i, j)$. This can be found in constant time by first finding the index v using the equation

$$v = \text{select}_{V_{\min}}(\text{rank}_{V_{\min}}(\text{node_color}_{\text{CMin}(A)}(\text{RRMinQ}_A(i, j)), 0) + 1, 0) - 1$$

and then finding the node n_v using $n_v = \text{node}_{V_{\min}}(v)$. If $\text{child_rank}_{\text{CMin}(A)}(n_v) \leq \text{child_rank}_{\text{CMin}(A)}(\text{leftmost}(i, j))$ or $\text{child_rank}_{\text{CMin}(A)}(n_v) = 1$ (this is the case that $\text{leftmost}(i, j)$ can be the leftmost sibling), then $\text{RLMinQ}_A(i, j) = \text{leftmost}(i, j)$. Otherwise, $\text{RLMinQ}_A(i, j) = n_v$.

RkMinQ_A(i, j): This query can be answered in constant time by returning the k -th sibling (in the left-to-right order) of $\text{RLMinQ}_A(i, j)$, if it exists. More formally, if $\text{child_rank}_{\text{CMin}(A)}(\text{RRMinQ}_A(i, j)) - \text{child_rank}_{\text{CMin}(A)}(\text{RLMinQ}_A(i, j))$ is at least $k - 1$, then $\text{RkMinQ}_A(i, j)$ exists; and in this case, $\text{RkMinQ}_A(i, j)$ can be computed in constant time by computing

$$\text{child}_{\text{CMin}(A)}(\text{parent}_{\text{CMin}(A)}(\text{RRMinQ}_A(i, j)), \text{RLMinQ}_A(i, j) + k - 1).$$

NSV_A(i): By Lemma 2.5, it is enough to show how to support $\text{NRS}(i)$ in constant time (note that we can support subtree_size in constant time using Lemma 2.3). If node i is the rightmost sibling, then $\text{NRS}(i)$ does not exist. Otherwise we define v' as $\text{select}_{V_{\min}}(\text{rank}_{V_{\min}}(\text{node_color}_{\text{CMin}(A)}(\text{next_sibling}(i)), 0), 0)$. Let $n_{v'} = \text{node}_{V_{\min}}(v')$. If the parent of $n_{v'}$ is same as the parent of i , then $\text{NRS}(i) = n_{v'}$; otherwise $\text{NRS}(i)$ does not exist. Finally, if $\text{NRS}(i)$ does not exist, we compute the node r which is the rightmost sibling of the node i can be found by

$$\text{child}_{\text{CMin}(A)}(\text{parent}_{\text{CMin}(A)}(i), \text{degree}_{\text{CMin}(A)}(\text{parent}_{\text{CMin}(A)}(i)) - 1).$$

Then $\text{NSV}_A(i) = r + \text{subtree_size}_{\text{CMin}(A)}(r)$. All these operations can be done in constant time. $\square$

4 Encoding colored 2d-Min and 2d-Max heaps

In this section, we describe our encodings for supporting various subsets of operations, proving the results stated in Theorem 1. As mentioned in Section 2.1, the TC-encoding of the colored 2d-Min heap of Fischer [11]

can answer RMinQ_A , RRMinQ_A , PSV_A and NSV_A queries in $O(1)$ time, using $2.54n + o(n)$ bits. The following lemma shows that we can also support the queries RLMinQ_A and RkMinQ_A using the same structure.

Lemma 4.1. *For an array $A[1 \dots n]$ of length n , RLMinQ_A , RkMinQ_A can be answered in constant time by the TC-encoding of colored 2d-Min heap.*

Proof. Fischer [11] defined two operations, which are modifications of the *child* and *child_rank*, as follows:

- $\text{mchild}_{\text{CMin}(A)}(x, i)$ - returns the i -th red child of node x in $\text{CMin}(A)$, and
- $\text{mchild_rank}_{\text{CMin}(A)}(x)$ - returns the number of red siblings to the left of node x in $\text{CMin}(A)$.

He showed that the TC-encoding of the colored 2d-Min heap can support $\text{mchild}_{\text{CMin}(A)}(x, i)$ and $\text{mchild_rank}_{\text{CMin}(A)}(x)$ in constant time. Also, since the TC-encoding supports $\text{depth}_{\text{CMin}(A)}$, $\text{next_sibling}_{\text{CMin}(A)}$, $\text{la}_{\text{CMin}(A)}$, $\text{child}_{\text{CMin}(A)}$ and $\text{child_rank}_{\text{CMin}(A)}$ in constant time on ordinal trees [21], we can support $\text{leftmost}(i, j)$ (defined in the proof of the Lemma 3.1) in constant time. For answering $\text{RLMinQ}_A(i, j)$, we first find the previous red sibling l of $\text{RRMinQ}_A(i, j)$ using $\text{mchild}_{\text{CMin}(A)}$ and $\text{mchild_rank}_{\text{CMin}(A)}$. If such a node l exists, we compare the child ranks of $\text{next_sibling}_{\text{CMin}(A)}(l)$ and $\text{leftmost}(i, j)$, and return the node with the larger rank value as the answer. $\text{RkMinQ}_A(i, j)$ can be answered by returning the k -th sibling (in the left-to-right order) of $\text{RLMinQ}_A(i, j)$ using $\text{child}_{\text{CMin}(A)}$ and $\text{child_rank}_{\text{CMin}(A)}$, if it exists. $\square$

By storing a similar TC-encoding of colored 2d-Max heap, in addition to the structure of Lemma 4.1, we can support all the operations mentioned in Theorem 1(c) in $O(1)$ time. This uses a total space of $5.08n + o(n)$ bits. We now describe alternative encodings to reduce the overall space usage.

More specifically, we show that a combined encoding of $D_{\text{CMin}(A)}$ and $D_{\text{CMax}(A)}$, using at most $3.17n + o(n)$ bits, can be used to answer RMinQ_A , RMaxQ_A , RRMinQ_A , RRMaxQ_A , PSV_A , and PLV_A queries (Theorem 1(a)). To support the queries in constant time, we use a less space-efficient data structure that encodes the same structures, using at most $3.322n + o(n)$ bits (Theorem 1(b)). Similarly, a combined encoding of $D_{\text{CMin}(A)}$, $D_{\text{CMax}(A)}$, $V_{\min}$ and $V_{\max}$ using at most $4.088n + o(n)$ bits can be used to answer RLMinQ_A , RkMinQ_A , NSV_A , RLMaxQ_A , RkMaxQ_A , and NLV_A queries in addition (Theorem 1(c)). Again, to support the queries in constant time, we design a less space-efficient data structure using at most $4.58n + o(n)$ bits (Theorem 1(d)).

In the following, we first describe the data structure of Theorem 1(b) followed by the structure for Theorem 1(d). Next we describe the encodings of Theorem 1(a) and Theorem 1(c).

4.1 Combined data structure for $D_{\text{CMin}(A)}$ and $D_{\text{CMax}(A)}$

As mentioned in Section 2.2, the encoding of Gawrychowski and Nicholson [15] consists of two bit strings U and T of total length at most $3n$, along with the encodings of $B_{\min}$, $B_{\max}$ and a few additional auxiliary structures of total size $o(n)$ bits. In this section, we denote this encoding by E . To encode the DFUDS sequences of $\text{CMin}(A)$ and $\text{CMax}(A)$ in a single structure, we use E with some modifications, which we denote by E' . As described in Section 2.2, encoding scheme of Gawrychowski and Nicholson cannot be used (as it is) to support the PSV and PLV queries if there is a position i , for $1 \leq i < n$ such that $A[i] = A[i + 1]$. To support these queries, we define an additional bit string $C[1 \dots n]$ such that $C[1] = 0$, and for $1 < i \leq n$, $C[i] = 1$ iff $A[i - 1] = A[i]$. If the bit string C has k ones in it, then we represent C using $\lg \binom{n}{k} + o(n)$ bits while supporting rank , select queries and decoding any $\lg n$ consecutive bits in C in constant time, using Lemma 2.1. We also define a new array $A'[0 \dots n - k]$ by setting $A'[0] = A[0]$, and for $0 < i \leq n - k$, $A'[i] = A[\text{select}_C(i, 0)]$. (Note that A' has no consecutive repeated elements.) In addition, we define another sequence $D'_{\text{CMin}(A)}$ of size $2n - k$ as follows. Suppose $D_{\text{CMin}(A)} = (\delta_1) \dots (\delta_{n-k})$, for some $0 \leq \delta_1 \dots \delta_{n-k} \leq n - k$, then we set $D'_{\text{CMin}(A)} = (\delta_1 + \epsilon_1) \dots (\delta_{n-k} + \epsilon_{n-k})$, where $\delta_i + \epsilon_i$ is the number of elements popped when $A[i]$ is pushed into the min-stack of A , for $1 \leq i \leq n - k$. (Analogously, we define $D'_{\text{CMax}(A)}$.)

The encoding E' defined on A consists of two bit strings U' and T' , along with C , $B'_{\min}$, $B'_{\max}$ and additional auxiliary structures (as in E). Let U and T be the bit strings in E defined on A' . Then U' is

same as U in E , and size of U' is $n - k - 1$ bits. To obtain T' , we add some additional open parentheses to T as follows. Suppose $T = (\delta_1)(\delta_2)\dots(\delta_{n-k})$, where $0 \leq \delta_i \leq n - k$ for $1 \leq i \leq n - k$. Then $T' = (\delta_1 + \epsilon_1)\dots(\delta_{n-k} + \epsilon_{n-k})$, where $\delta_i + \epsilon_i$ is the number of elements are popped when $A[i]$ is pushed into the min or max stack of A , for $1 \leq i \leq n - k$ (see Figure 4 for an example). Since the length of T is at most $2(n - k)$, and $|T'| - |T| = \sum_{i=1}^{n-k} \epsilon_i \leq k$, the size of T' is at most $2n - k$ bits. The encodings of B'_{min} and B'_{max} are defined on $D'_{CMin(A)}$, $D'_{CMax(A)}$ and T' , similar to B_{min} and B_{max} in E . The total size of the encodings of the modified B'_{min} and B'_{max} is $o(n)$ bits. All the other auxiliary structures use $o(n)$ bits. Although we use E' instead of E , we can use the decoding algorithm in E without any modifications because all the properties used in the algorithm still hold even though T' has additional open parentheses compared to T . Therefore from E' we can reconstruct any $\lg n$ consecutive bits of $D'_{CMin(A)}$ or $D'_{CMax(A)}$ in constant time, and thus we can support rank and select on these strings in constant time with $o(n)$ additional structures by Lemma 2.1.

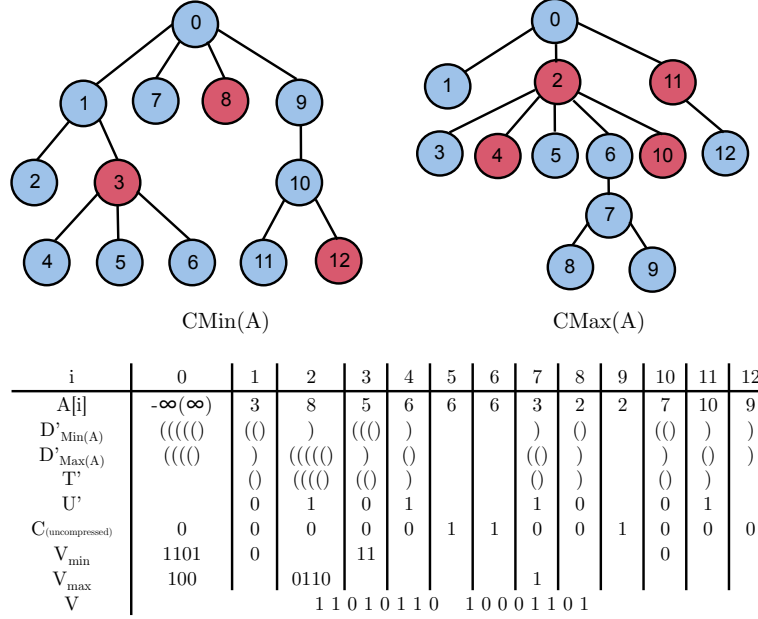


Figure 4: Data structure combining the colored $2d$ -Min heap and colored $2d$ -Max heap of A . C is represented in uncompressed form.

4.1.1 Decoding $D_{CMin(A)}$ and $D_{CMax(A)}$

We use the following auxiliary structures to decode $D_{CMin(A)}$ from $D'_{CMin(A)}$ and C . For this, we first define a correspondence between $D_{CMin(A)}$ and $D'_{CMin(A)}$ as follows. Note that both $D_{CMin(A)}$ and $D'_{CMin(A)}$ have the same number of open parentheses, but $D'_{CMin(A)}$ has fewer close parentheses than $D_{CMin(A)}$. The i th open parenthesis in $D_{CMin(A)}$ corresponds to the i th open parenthesis in $D'_{CMin(A)}$. Suppose there are ℓ and ℓ' ($\leq \ell$) close parentheses between the i th and the $(i + 1)$ st open parentheses in $D_{CMin(A)}$ and $D'_{CMin(A)}$, respectively. Then the last ℓ' close parentheses in $D_{CMin(A)}$ correspond, in that order, to the ℓ' close parentheses in $D'_{CMin(A)}$; the remaining close parentheses in $D_{CMin(A)}$ do not have a corresponding position in $D'_{CMin(A)}$.

We construct three bit strings P_{min} , Q_{min} and R_{min} of lengths $2n - k$, $\lceil 2n / \lg n \rceil$ and $\lceil 2n / \lg n \rceil$, respectively, as follows. For $1 \leq i \leq \lceil 2n / \lg n \rceil$, if the position $i \lg n$ in $D_{CMin(A)}$ has its corresponding position j in $D'_{CMin(A)}$, then we set $P_{min}[j] = 1$, $Q_{min}[i] = 0$ and $R_{min}[i] = 0$. If position $i \lg n$ in $D_{CMin(A)}$ has no corresponding position in $D'_{CMin(A)}$ but for some k_i where $1 \leq k_i < \lg n$, suppose there is a leftmost position

$q = i \lg n + k_i$ which has its corresponding position j in $D'_{\text{CMin(A)}}$. Then we set $P_{\min}[j] = 1$, $Q_{\min}[i] = 1$ and $R_{\min}[i] = 0$. Finally, if all positions between $i \lg n$ and $(i+1) \lg n$ in $D_{\text{CMin(A)}}$ have no corresponding position in $D'_{\text{CMin(A)}}$, then we set $Q_{\min}[i] = 1$ and $R_{\min}[i] = 1$. In remaining positions for $P_{\min}$, $Q_{\min}$ and $R_{\min}$, we set their values as 0. We also store the values, k_i explicitly, for $1 \leq i \leq \lceil 2n/\lg n \rceil$, whenever they are defined (as in the second case). Since $k_i < \lg n$, we can store all the k_i values explicitly using at most $2n \lg \lg n / \lg n = o(n)$ bits.

Since the bit strings $P_{\min}$, $Q_{\min}$ and $R_{\min}$ have at most $2n/\lg n$ 1's each, they can be represented using the structure of Lemma 2.1, taking $o(n)$ bits while supporting rank and select queries in constant time. We define $P_{\max}$, $Q_{\max}$, $R_{\max}$ in the same way, and represent them analogously.

In addition to these bit strings, we construct two pre-computed tables. In the rest of this section, we refer to the parenthesis strings (such as $D_{\text{CMin(A)}}$ and $D'_{\text{CMin(A)}}$) also as bit strings. To describe these tables, we first define two functions f and f' , each of which takes two bit strings s and c as parameters, and returns a bit string of length at most $|s| + |c|$, as follows.

$$\begin{cases} f(s, \epsilon) = s \\ f(\epsilon, c) = c \\ f(s, 1 \cdot c_1) = f(s, c_1) \\ f((^\delta) \cdot s_1, 0 \cdot c_1) = (^\delta) \cdot f(s_1, c_1) \end{cases} \quad \begin{cases} f'(s, \epsilon) = s \\ f'(\epsilon, c) = c \\ f'(s, c_1 \cdot 1) = f'(s, c_1) \cdot \\ f'(s_1 \cdot (^\delta), c_1 \cdot 0) = f'(s_1, c_1) \cdot (^\delta) \end{cases}$$

One can easily show that if s is a substring of $D'_{\text{CMin(A)}}$ and c is a substring of C whose starting (ending) position corresponds to the starting (ending) position in s , then $f(s, c)$ ($f'(s, c)$) returns the substring of $D_{\text{CMin(A)}}$ whose starting (ending) position corresponds to the starting (ending) position in s .

We construct a pre-computed table T_f that, for each possible choice of bit strings s and c of length $(1/4) \lg n$, stores the bit string $f(s, c)$. These pre-computed tables can be used to decode a substring of $D_{\text{CMin(A)}}$ given a substring of $D'_{\text{CMin(A)}}$ (denoted s) and a substring of C whose bits correspond to s . The total space usage of T_f is $2^{(1/4) \lg n} \cdot 2^{(1/4) \lg n} \cdot ((1/2) \lg n) = o(n)$ bits. We can also construct $T_{f'}$ defined analogously to T_f using $o(n)$ bits.

Now we describe how to decode $\lg n$ consecutive bits of $D_{\text{CMin(A)}}$ in constant time. (We can decode $\lg n$ consecutive bits of $D_{\text{CMax(A)}}$ in a similar way.) Suppose we divide $D_{\text{CMin(A)}}$ into blocks of size $\lg n$. As described in Section 2.2, it is enough to show that for $1 \leq i \leq \lceil 2n/\lg n \rceil$, we can decode i -th block of $D_{\text{CMin(A)}}$ in constant time. First, we check the value of the $R_{\min}[i]$. If $R_{\min}[i] = 1$, then the i -th block in $D_{\text{CMin(A)}}$ consists of a sequence of $\lg n$ consecutive close parentheses. Otherwise, there are two cases depending on the value of $Q_{\min}[i]$. We compute the position p which is a position in $D'_{\text{CMin(A)}}$ (it's exact correspondence in $D_{\text{CMin(A)}}$ depends on the value of the bit $Q_{\min}[i]$), and then compute the position c_p in C which corresponds to p in $D'_{\text{CMin(A)}}$, using the following equations:

$$p = \text{select}_{P_{\min}}(i - \text{rank}_{R_{\min}}(i, 1), 1)$$

$$c_p = \begin{cases} \text{select}_C(\text{rank}_{D'_{\text{CMin(A)}}}(p, ' '), 0) & \text{if } D'_{\text{CMin(A)}}[p] = ' ' \\ \text{select}_C(\text{rank}_{D'_{\text{CMin(A)}}}(p, ' ') + 1, 0) & \text{otherwise} \end{cases}$$

Case (1) $Q_{\min}[i] = 0$. In this case, we take the $\lg n$ consecutive bits of $D'_{\text{CMin(A)}}$ starting from p , and the $\lg n$ consecutive bits of C starting from the position c_p (padding at the end with zeros if necessary). Using these bit strings, we can decode the i -block in $D_{\text{CMin(A)}}$ by looking up T_f with these substrings (a constant number of times, until the pre-computed table generates the required $\lg n$ bits). Since the position p corresponds to the starting position of the i -th block in $D_{\text{CMin(A)}}$ in this case, we can decode the i -th block of $D_{\text{CMin(A)}}$ in constant time.

Case (2) $Q_{\min}[i] = 1$. First we decode $\lg n$ consecutive bits of $D_{\text{CMin(A)}}$ whose starting position corresponds to the position p using the same procedure as in Case (1). Let S_1 be this bit string. Next, we take the $\lg n$ consecutive bits of $D'_{\text{CMin(A)}}$ ending with position p , and the $\lg n$ consecutive bits of C ending

with position c_p (padding at the beginning with zeros if necessary). Then we can decode the $\lg n$ consecutive bits of $D_{\text{CMin}(A)}$ whose ending position corresponds to the p by looking up $T_{f'}$ (a constant number of times) with these substrings. Let S_2 be this bit string. By concatenating S_1 and S_2 , we obtain a $2 \lg n$ -bit substring of $D_{\text{CMin}(A)}$ which contains the starting position of the i -th block of $D_{\text{CMin}(A)}$ (since the starting position of the i -th block in $D_{\text{CMin}(A)}$, and the position which corresponds to p differ by at most $\lg n$). Finally, we can obtain the i -th block in $D_{\text{CMin}(A)}$ by skipping the first $\lg n - k_i$ bits in $S_1 \cdot S_2$, and taking $\lg n$ consecutive bits from there.

From the encoding described above, we can decode any $\lg n$ consecutive bits of $D_{\text{CMin}(A)}$ and $D_{\text{CMax}(A)}$ in constant time. Therefore by Lemma 3.1, we can answer all queries supported by $\text{CMin}(A)$ and $\text{CMax}(A)$ (without using the color information) in constant time. If there are k elements such that $A[i-1] = A[i]$ for $1 \leq i \leq n$, then the size of C is $\lg \binom{n}{k} + o(n)$ bits, and the size of E' on A is $3n - 2k + o(n)$ bits. All other auxiliary bit strings and tables take $o(n)$ bits. Therefore, by the Lemma 2.4, we can encode A using $3n - 2k + \lg \binom{n}{k} + o(n) \leq ((1 + \lg 5)n + o(n)) < 3.322n + o(n)$ bits. Also, this encoding supports the queries in Theorem 1(b) (namely RMinQ_A , RMaxQ_A , RRMinQ_A , RRMaxQ_A , PSV_A and PLV_A , which do not need the color information) in constant time. This proves Theorem 1(b).

Note that if $k = 0$ (i.e, there are no consecutive equal elements), E' on A is same as E on A . Therefore, we can support all the queries in Theorem 1(b) using $3n + o(n)$ bits with constant query time.

4.1.2 Encoding $V_{\min}$ and $V_{\max}$

We simply concatenate $V_{\max}$ and $V_{\min}$ on A and store it as bitstring V , and store the length of $V_{\min}$ using $\lg n$ bits (see V in Figure 4). If there are k elements such that $A[i-1] = A[i]$ for $1 \leq i \leq n$, Fischer and Heun's stack based algorithm [7] does not pop any elements from both stacks when these k elements and $A[n]$ are pushed into them. Before pushing any of the remaining elements into the min- and max-stacks, we pop some elements from exactly one of the stacks. Also after pushing $A[1]$ into both the stacks, we pop the remaining elements from the stacks in the final step. Suppose the n elements are popped from the min-stack during p runs of pop operations. Then, it is easy show that the elements are popped from the max-stack during $n - k - p$ runs of pop operations. Also, $p(n - k - p)$ is the number of leftmost children in $\text{CMin}(A)$ ($\text{CMax}(A)$) since each run of pop operations generates exactly one open parenthesis whose matched closing parenthesis corresponds to the leftmost child in $\text{CMin}(A)$ ($\text{CMax}(A)$). As described in Section 3, the size of $V_{\min}$ is $n - p + 1$ bits, and that of $V_{\max}$ is $p + k + 1$ bits. Thus, the total size of V is $n + k + 2$ bits.

Therefore, we can decode any $\lg n$ -bit substring of $V_{\min}$ or $V_{\max}$ in constant time using V and the length of $V_{\min}$. By combining these structures with the encoding of Theorem 1(b), we can support the queries in Theorem 1(d) (namely, the queries RMinQ_A , RRMinQ_A , RLMinQ_A , RkMinQ_A , PSV_A , NSV_A , RMaxQ_A , RRMaxQ_A , RLMaxQ_A , RkMaxQ_A , PLV_A and NLV_A) in constant time. By Lemma 2.4, the total space of these structures is $4n - k + \lg \binom{n}{k} + o(n) \leq ((3 + \lg 3)n + o(n)) < 4.585n + o(n)$ bits. This proves Theorem 1(d).

Note that if $k = 0$ (i.e, there are no consecutive equal elements), E' on A is same as E on A , and the size of V is $n + 2$ bits. Therefore we can support all the queries in Theorem 1(d) using $4n + o(n)$ bits with constant query time.

4.2 Encoding colored $2d$ -Min and $2d$ -Max heaps using less space

In this section, we give new encodings that prove Theorem 1(a) and Theorem 1(c), which use less space but take more query time than the previous encodings. To prove Theorem 1(a), we maintain the encoding E' on A , with the modification that instead of T' (which takes at most $2n - k$ bits), we store the bit string T (which takes at most $2(n - k)$ bits) which is obtained by constructing the encoding E on A' . Note that $f(s, c)$ is well-defined when s and c are substrings of $D_{\text{CMin}(A')}$ and C , respectively. If there are k elements such that $A[i-1] = A[i]$ for $1 \leq i \leq n$, then the total size of the encoding is at most $3(n - k) + \lg \binom{n}{k} + o(n) \leq n \lg 9 + o(n) < 3.17n + o(n)$ bits. If we can reconstruct the sequences $D_{\text{CMin}(A)}$ and $D_{\text{CMax}(A)}$, by Lemma 3.1, we can support all the required queries. We now describe how to decode the entire $D_{\text{CMin}(A)}$ using this encoding. (Decoding $D_{\text{CMax}(A)}$ can be done analogously.)

Once we decode the sequence $D_{\text{CMin}(A')}$, we reconstruct the sequence $D_{\text{CMin}(A)}$ by scanning the sequences $D_{\text{CMin}(A')}$ and C from left to right, and using the lookup table T_f . Note that $f(D_{\text{CMin}(A')}, C)$ loses some open parentheses in $D_{\text{CMin}(A)}$ whose matched close parentheses are not in $D_{\text{CMin}(A')}$ but in $f(D_{\text{CMin}(A')}, C)$. So when we add m consecutive close parentheses from the r -th position in $D_{\text{CMin}(A')}$ in decoding with T_f , we add m more open parentheses before the position $pos = \text{findopen}_{D_{\text{CMin}(A')}}(r - 1)$. This proves Theorem 1(a).

To prove Theorem 1(c), we combine the concatenated sequence of $V_{\min}$ and $V_{\max}$ on A' whose total size is $n - k + 2$ bits to the above encoding. Then we can reconstruct $V_{\min}$ on A by adding m extra 1's before $V_{\min}[\text{rank}_{D_{\text{CMin}(A')}}(pos, '()']$ when m consecutive close parentheses are added from the r -th position in $D_{\text{CMin}(A')}$ while decoding with T_f . (Reconstructing $V_{\max}$ on A can be done in a similar way.) The space usage of this encoding is $4(n - k) + \lg \binom{n}{k} + o(n) \leq n \lg 17 + o(n) < 4.088n + o(n)$ bits. This proves Theorem 1(c).

5 Conclusion

We obtained space-efficient encodings that support a large set of range and previous/next smaller/larger value queries. The encodings that support the queries in constant time take more space than the ones that do not support the queries in constant time.

We conclude with the following open problems.

- Can we support the queries in the Theorem 1(c) in $O(1)$ time using at most $4.088n + o(n)$ bits?
- As described in Section 2, Gawrychowski and Nicholson [15] show that any encoding that supports both RMinQ_A and RMaxQ_A requires at least $3n - \Theta(\lg n)$ bits. Can we obtain an improved lower bound in the case when we need to support the queries in Theorem 1(a)?
- Can we prove a lower bound that is strictly more than $3n$ bits for any encoding that supports the queries in Theorem 1(c)?

Acknowledgments. We thank Ian Munro and Meng He for helpful discussions, and Patrick Nicholson and Pawel Gawrychowski for pointing out mistakes in an earlier version.

References

- [1] S. Jo, S. R. Satti, Simultaneous encodings for range and next/previous larger/smaller value queries, in: Computing and Combinatorics - 21st International Conference, COCOON 2015, Proceedings, 2015, pp. 648–660.
- [2] M. J. Golin, J. Iacono, D. Krizanc, R. Raman, S. S. Rao, Encoding 2d range maximum queries, in: ISAAC, Vol. 7074 of LNCS, Springer, 2011, pp. 180–189.
- [3] P. B. Miltersen, Cell probe complexity - a survey, FSTTCS.
- [4] M. A. Bender, M. Farach-Colton, The LCA problem revisited, in: LATIN 2000, Proceedings, 2000, pp. 88–94.
- [5] K. Sadakane, Succinct data structures for flexible text retrieval systems, Journal of Discrete Algorithms 5 (1) (2007) 12–22.
- [6] J. I. Munro, V. Raman, Succinct representation of balanced parentheses and static trees, SIAM Journal on Computing 31 (3) (2001) 762–776.
- [7] J. Fischer, V. Heun, Space-efficient preprocessing schemes for range minimum queries on static arrays, SIAM Journal on Computing 40 (2) (2011) 465–492.

- [8] D. Benoit, E. D. Demaine, J. I. Munro, R. Raman, V. Raman, S. S. Rao, Representing trees of higher degree, *Algorithmica* 43 (4) (2005) 275–292.
- [9] P. Davoodi, R. Raman, S. R. Satti, Succinct representations of binary trees for range minimum queries, in: *COCOON 2012, Proceedings, 2012*, pp. 396–407.
- [10] J. Fischer, V. Heun, Finding range minima in the middle: Approximations and applications, *Mathematics in Computer Science* 3 (1) (2010) 17–30.
- [11] J. Fischer, Combined data structure for previous- and next-smaller-values, *Theor. Comput. Sci.* 412 (22) (2011) 2451–2456.
- [12] O. Berkman, B. Schieber, U. Vishkin, Optimal doubly logarithmic parallel algorithms based on finding all nearest smaller values, *J. Algorithms* 14 (3) (1993) 344–370.
- [13] T. Asano, D. G. Kirkpatrick, Time-space tradeoffs for all-nearest-larger-neighbors problems, in: *WADS*, Vol. 8037 of *Lecture Notes in Computer Science*, Springer, 2013, pp. 61–72.
- [14] V. Jayapaul, S. Jo, V. Raman, S. R. Satti, Space efficient data structures for nearest larger neighbor, in: *IWOCA Revised Selected Papers, 2014*, pp. 176–187.
- [15] P. Gawrychowski, P. K. Nicholson, Optimal encodings for range top- k , selection, and min-max, in: *Automata, Languages, and Programming - 42nd International Colloquium, ICALP 2015, Proceedings, Part I, 2015*, pp. 593–604.
- [16] J. I. Munro, V. Raman, S. S. Rao, Space efficient suffix trees, *J. Algorithms* 39 (2) (2001) 205–222.
- [17] R. Raman, V. Raman, S. R. Satti, Succinct indexable dictionaries with applications to encoding k -ary trees, prefix sums and multisets, *ACM Transactions on Algorithms* 3 (4) (2007) Article 43.
- [18] D. Arroyuelo, R. Cánovas, G. Navarro, K. Sadakane, Succinct trees in practice, in: *ALENEX 2010*, Austin, Texas, USA, January 16, 2010, 2010, pp. 84–97.
- [19] J. Jansson, K. Sadakane, W.-K. Sung, Ultra-succinct representation of ordered trees with applications, *J. Comput. Syst. Sci.* 78 (2) (2012) 619–631.
- [20] A. Farzan, J. I. Munro, A uniform paradigm to succinctly encode various families of trees, *Algorithmica* 68 (1) (2014) 16–40.
- [21] M. He, J. I. Munro, S. R. Satti, Succinct ordinal trees based on tree covering, *ACM Transactions on Algorithms* 8 (4) (2012) 42.